

1 **INCORPORATING UNRELIABILITY OF TRANSIT IN TRANSPORT DEMAND MODELS:**  
2 **THEORETICAL AND PRACTIAL APPROACH**

3  
4 *Prepared for the 93rd Annual Meeting of the Transportation Research Board 2014*  
5

6 Dr. ir.Niels van Oort  
7 Delft University of Technology / Goudappel Coffeng  
8 Faculty of Civil Engineering and Geosciences  
9 Transport & Planning  
10 P.O. Box 5048  
11 2600 GA Delft, the Netherlands  
12 Telephone: +31.6.15908644  
13 E-mail: [N.vanOort@TUDelft.nl](mailto:N.vanOort@TUDelft.nl) (corresponding author)  
14

15 Ir. Ties Brands  
16 University of Twente / Goudappel Coffeng  
17 Faculty of Engineering Technology  
18 Centre for Transport Studies  
19 P.O. Box 217  
20 7500 AE Enschede, the Netherlands  
21 Telephone: +31 53 489 4704  
22 E-mail: [t.brands@utwente.nl](mailto:t.brands@utwente.nl)  
23

24 Prof.dr. ir. Erik de Romph  
25 Delft University of Technology / Omnitrans International  
26 Faculty of Civil Engineering and Geosciences  
27 Transport & Planning  
28 P.O. Box 5048  
29 2600 GA Delft, the Netherlands  
30 Telephone: +31.6.20604452  
31 E-mail: [E.deRomph@TUDelft.nl](mailto:E.deRomph@TUDelft.nl)  
32

33 Jessica Aceves Flores, B. Eng.  
34 Delft University of Technology  
35 Faculty of Civil Engineering and Geosciences  
36 Transport & Planning  
37 P.O. Box 5048  
38 2600 GA Delft, the Netherlands  
39 Telephone: +31.6.16972924  
40 E-mail: [J.L.AcevesFlores@student.TUDelft.nl](mailto:J.L.AcevesFlores@student.TUDelft.nl)  
41

42 November 2013  
43

44 Word count:  
45 Abstract (187) + Text (4452) + Figures/Tables (8\*250) = 6639

**1 ABSTRACT**

2 Nowadays, transport demand models do not explicitly evaluate the impacts of service reliability of transit.  
3 Service reliability of transit systems is adversely experienced by users, as it causes additional travel time  
4 and unsecure arrival times. Because of this, travelers are likely to perceive a higher utility from higher  
5 reliable transport systems. In order to mimic and measure the impacts of service reliability on a transit  
6 demand model a three-step approach is proposed using intelligent transport systems data. The approach  
7 consists of determining the probabilistic distribution of transit trip times, defining demand patterns and  
8 estimating the average impacts of unreliability per passenger. This approach was successfully tested on  
9 the model of the city of Utrecht in The Netherlands. By adding service reliability as a variable parameter  
10 of transit systems the results of the demand model improved showing that the absolute difference between  
11 the observed and the estimated demand decreased by 18%. In addition, the proposed approach allows  
12 measuring the effects of expected changes in level of service reliability on traveler behavior. Finally, the  
13 authors have identified future research topics required to improve the estimation of those effects.

## 1. INTRODUCTION

Service reliability has been researched for a long time for both car traffic and transit, studying its cause and measuring the magnitude of its consequences. The consequences of unreliability have been statistically analyzed in terms of probability of occurrence and related impacts on operations and infrastructure performance. It is still not common practice, however, to include service reliability as an explanatory variable in transport demand models in order to measure its impacts on the demand component of the transport network (1).

Transit services have proven to represent sustainable transport solutions for mobility. Attention for studies related to transit quality and efficiency is growing for its potential to increase its cost-effectiveness in order to prove financial feasibility. In particular service reliability has been pointed out as a recommended direction to improve transport models (2) showing statistical significance to explain passenger behavior (3) and as a consequence nowadays several transit projects aim at improving service reliability.

Transit service reliability is the certainty with which service aspects (such as travel time, departure time and arrival time) match the scheduled aspects as perceived by the user (4). Both passengers and operators benefit from enhanced service reliability by predictable travel times and by lower costs respectively.

Due to the lack of a proper theoretical framework that enables evaluating and predicting passenger impacts in a network context, commonly service reliability is not taken into account in transport demand models nor in most cost benefit analyses (5). To the authors' knowledge currently transport demand models assume that transit is 100% punctual and the impacts of unreliability are only implicitly incorporated. This limits the prediction accuracy of the models and in addition it is not possible to estimate the impacts of expected changes of service reliability on transport demand and as a consequence on (societal) costs and benefits (5).

Developments and improvements of data availability in transit, such as automated vehicle location (AVL) and automated passenger counting systems (APC), enable detailed research in order to develop measures to improve service reliability at all levels of transit planning and operations as shown in (4, 7,8 and 9).

In this paper, a methodology is presented to integrate the estimation of the effects of service reliability on a static transit demand model. This project is a first step to harmonize standards in demand modeling concerning transit service reliability effects. The paper is organized as follows: the next section presents the state of the art of the impact of service reliability in discrete choice modeling. Section three provides the proposed approach developed to incorporate the effect of transit service reliability in a transport demand model. In section four the methodology is applied to a case study in the city of Utrecht, The Netherlands. Section five provides a discussion of the results and future research and finally conclusions are presented in section six.

## 2. STATE OF THE ART OF MODELING SERVICE RELIABILITY

The level of service reliability affects several choices made by travelers, such as mode, route and departure time. In literature, much research is available with regard to passenger choices as a function of service reliability. According to (10) and (11) service reliability of transit systems is considered critically important by most transit users because passengers are adversely affected by the consequences associated with unreliability such as additional waiting time, late or early arrival at destinations and missed connections, generating a disutility associated to the transport alternatives in question.

There are two main approaches to model the effects of service reliability known as the mean-variance approach and the scheduling approach (3). The mean-variance approach represents the effects of service reliability on mode and route choice as a function of the mean travel time, additional travel time and variance of travel time caused by unreliability, while the scheduling approach studies the impact of service reliability on the departure time choice as a function of the probability of early or late schedule adherence. To the authors knowledge there is no generalized theoretical preference for one of these two approaches. However, in order to implement service reliability in four step models the mean-variance

1 approach is suggested (12). The mean-variance approach consists on adding attributes of service  
2 reliability to the transit generalized cost function along with other transit attributes such as distance, travel  
3 time, waiting time, fare, and number of transfers.


4  
5 For this research the destination and mode choice are modeled simultaneously through a gravity  
6 model using a deterrence function proportional to the generalized cost function. To model the variation in  
7 preference for route choice the Zenith method for transit assignment as described in (13) is used with a  
8 logit formulation dependent on the generalized cost function including service reliability attributes.

9 The following subsection provides an explanation of the attributes of service reliability to include  
10 in the transit generalized cost function in order to explain passenger behavior in a transport demand  
11 model.

## 12 **2.1 Service Reliability Impacts on Passengers**

13 Unreliability causes longer and uncertain passenger journeys (4). Figure 1 shows the passenger trip chain  
14 and its relation to vehicle processes. Transit vehicles are scheduled to leave a stop at a departure time with  
15 a time interval from its predecessor known as headway. The successive part of the trip is the in-vehicle  
16 time. In this phase, the passenger time aspects are similar to those of the vehicle. If a passenger makes a  
17 transfer, a new waiting time for the passenger will arise. This new waiting time is affected by the planned  
18 synchronization between the two connecting vehicles, the actual performance of this synchronization and  
19 the waiting regime of the connecting vehicle (14).

20 The magnitude of the delays caused on the passenger waiting time by the adherence to the  
21 schedule depends on the passenger arrival pattern. If passengers arrive randomly, the headway between  
22 successive vehicles determines the waiting time (15). If passengers arrive in conformance with the  
23 scheduled departure time, the deviation of the schedule adherence affects the waiting time (6). For  
24 example if the vehicle departs earlier than scheduled, passengers have to wait a full headway.  
25  
26

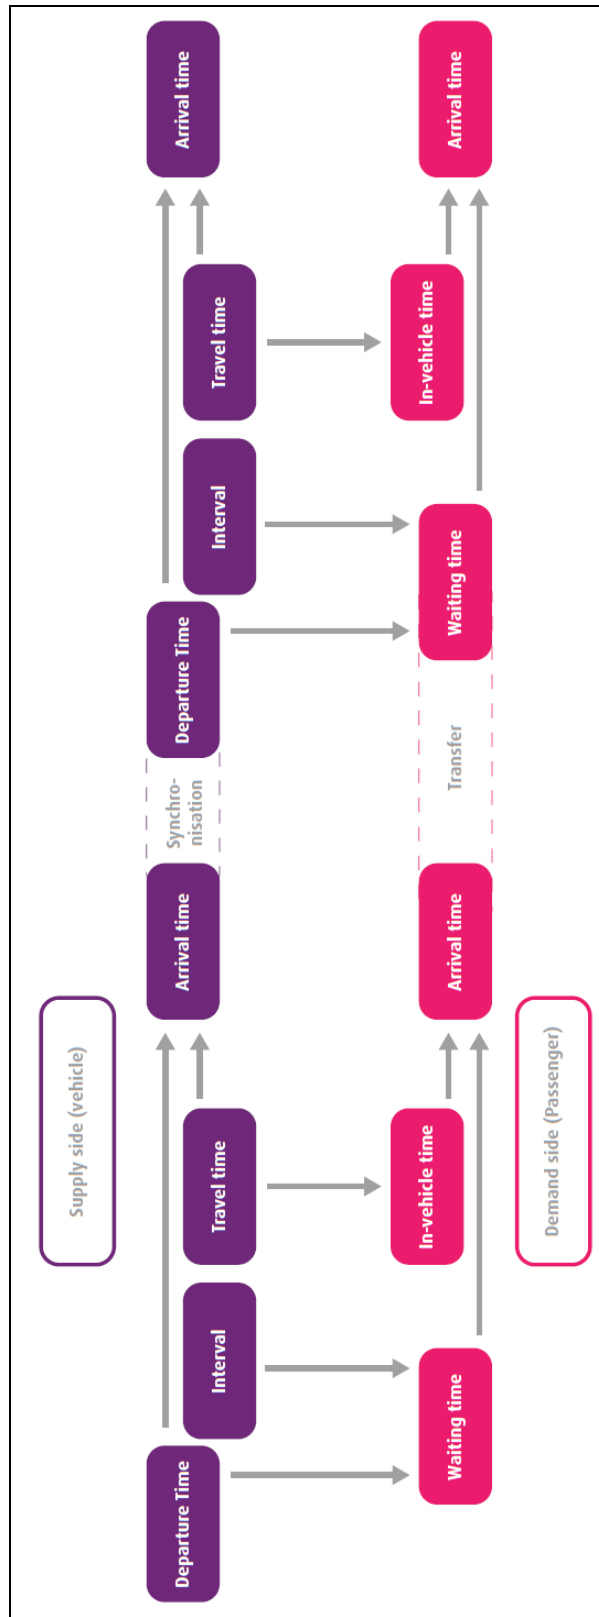

1  
2  
3

**FIGURE 1** Interaction of passenger trip chain (below) and vehicle characteristics (above).

1 Due to the stochastic nature, the impacts on individual passengers are variable; however in an  
 2 aggregated way passengers mainly experience the following three effects (16, 17 and 18):  
 3

4 i. Impacts on duration of travel time components, being in-vehicle time and waiting time, which  
 5 lead to arriving early or late;  
 6

7 ii. Impacts on passenger perception of the transit mode depending on the variability of travel time  
 8 components, being departure time, arrival time, in-vehicle time and waiting time, which lead to  
 9 uncertainty of the actual travel time;


10 iii. Impact on the probability of finding a seat and of crowding, affecting the level of comfort of  
 11 the journey.  
 12

13  
 14 This paper focuses on the first two aspects, namely the travel time related aspects. More detailed  
 15 research on crowding may be found for instance in (19).

16 To calculate the passenger effects of unreliability actual departure times per stop, actual dwell  
 17 times, actual headways and actual trip times available by AVL systems or forecast tools such as  
 18 illustrated in (20), are translated to passenger effects using APC data.

19 In an aggregated way, service reliability leads to an extension of passenger average travel time,  
 20 since average waiting time per passenger may be extended due to irregular, early or late vehicles. To  
 21 express the effect of service reliability on passengers an indicator called average additional travel time per  
 22 passenger is introduced (18). The second effect of service variability is the variance of passenger travel  
 23 time.

24 Figure 2 illustrates the average additional travel time per passenger ( $T^{add}$ ) and the variability of  
 25 actual travel time relative to the scheduled travel time (4). It is important to note that  $T^{journey, sched}$  consists  
 26 of the scheduled waiting time and the scheduled in-vehicle time. The latter is directly related to the  
 27 scheduled vehicle trip time and is thus controllable being a function of schedule design (e.g. tight or loose  
 28 schedule). Figure 2 shows that the additional travel time is distributed, due to variability of the operations.  
 29 In some cases individual passengers may even arrive earlier than scheduled, when waiting and or in-  
 30 vehicle time is shorter than planned.

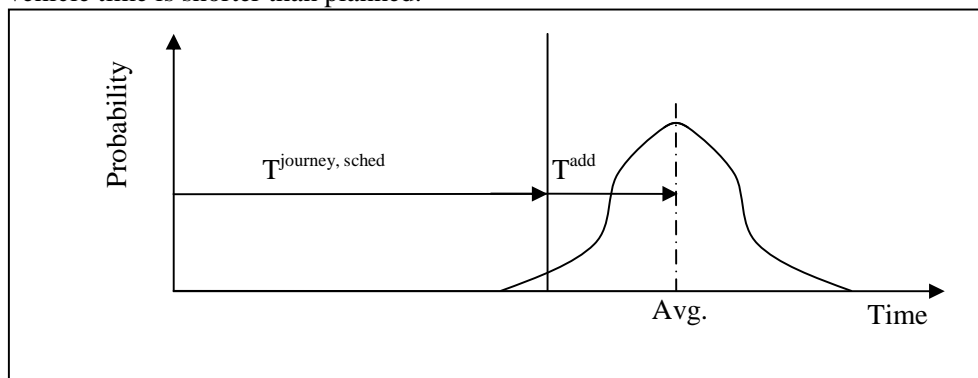

31  
 32 **FIGURE 2 Scheduled passenger time ( $T^{journey, sched}$ ), average additional travel time per passenger**  
 33 **( $T^{add}$ ) and variance.**  
 34

35 Table 1 shows a matrix of four components that represent the passenger impacts of service  
 36 reliability (4). However, if operations are not controlled in any way (e.g. by holding vehicles), no  
 37 additional in-vehicle trip time arises (compared to the average trip), so only the three remaining  
 38 components shown in the matrix with the numbers 1, 2 and 3 are investigated.  
 39  
 40

1 **TABLE 1 Passenger Impacts of Service Reliability**

	Additional travel time	Travel time variance
In-vehicle time	$na$	2
Waiting time	$l$	3

2  
3 Finally the passenger impacts of service reliability are represented by three attributes that are  
4 added to the generalized cost function: additional waiting time, in-vehicle travel time variance and  
5 waiting time variance. The proposed generalized cost function is shown in Equation 1.

$$6 \quad GC = \alpha + \beta_1 d + \beta_2 \left( \hat{T} + \hat{W} + \frac{\beta_3}{\beta_2} v \right) + \beta_4 f + \beta_5 N \quad (1)$$

7 Where:

8  $GC$  = generalized cost in €

9  $d$  = distance in  $Km$

10  $\hat{T}$  = average travel time in  $hours$

11  $\hat{W}$  =  $W + T^{add}$ ; average waiting time in  $hours$

12  $v$  =  $v_{in-vehicle} + v_{waiting}$ ; variance of both in-vehicle and waiting time in  $hours$

13  $f$  = fare in €

14  $N$  = number of transfers

15  $\alpha$  = alternative specific constant in €

16  $\beta_1$  = elasticity measure of distance in  $€/Km$

17  $\beta_2$  = elasticity measure of travel time a.k.a. value of time in  $€/hour$

18  $\beta_3$  = elasticity measure of variance of travel time a.k.a. value of reliability in  $€/hour$

19  $\frac{\beta_3}{\beta_2}$  = reliability ratio

20  $\beta_4$  = elasticity measure of transit fares

21  $\beta_5$  = elasticity measure of the number of transfers in  $€/transfer$

22  
23 In order to calculate the additional waiting time component, two situations have to be  
24 distinguished: high frequency transit systems (with random arrivals of passengers at the stop) and low  
25 frequency transit systems (with planned arrivals of passengers at the stop).

26 If passengers arrive randomly, exact departure times and punctuality are not relevant anymore,  
27 because passengers do not use a schedule. In that scenario, the additional travel time is calculated using  
28 the coefficient of variation (CoV) of the actual headways ( $\tilde{H}_{l,j}^{act}$ ). A generic formulation to estimate the  
29 expected waiting time per passenger is given by Equation 2(15, 21 and 22), according to the following  
30 assumptions:

- 31 - The examined period is homogeneous concerning scheduled departure times, trip times and  
32 headways (for instance rush-hour on working days in a month);  
33 - The passenger pattern on the line is assumed to be fixed;  
34 - All passengers are able to board to the first arriving vehicle.

$$35 \quad E(\tilde{T}_{l,j}^{waiting}) = \frac{E(\tilde{H}_{l,j}^{act})}{2} * (1 + CoV^2(\tilde{H}_{l,j}^{act})) \quad (2)$$

36 Where:

37  $\tilde{T}_{l,j}^{waiting}$  = passenger waiting time for line  $l$  at stop  $j$

1  $\tilde{H}_{l,j}^{act}$  = actual headway of line  $l$  at stop  $j$   
 2  $CoV(\tilde{H}_{l,j}^{act})$  = coefficient of variation of actual headways of line  $l$  at stop  $j$   
 3

4 If the service is regular, the coefficient of variation equals zero and the average waiting time will  
 5 be equal to half the headway. In the case of irregular service, the additional waiting time may then be  
 6 calculated using Equation 3. Assuming no change in the actual vehicle trip times, the total average  
 7 additional travel time per passenger will be equal to the average additional waiting time per passenger.

$$8 \quad E(\tilde{T}_{l,j}^{Add,waiting}) = \frac{E(\tilde{H}_{l,j}^{act})}{2} * (CoV^2(\tilde{H}_{l,j}^{act})) \quad (3)$$

9 Where:

10  $E(\tilde{T}_{l,j}^{Add,waiting})$  = average additional waiting time per passenger due to unreliability of line  $l$  at  
 11 stop  $j$   
 12

13 For low frequency services it is assumed that passengers plan their arrival at the first stop of their  
 14 trip according to the schedule and therefore another method of calculating additional travel time is  
 15 necessary. Equations 4 and 5 show this method (6). Passengers are assumed to arrive randomly within a  
 16 range of the scheduled departure time minus  $\tau_{early}$  and plus  $\tau_{late}$  and if the vehicle departs within this time  
 17 window it is assumed that passengers do not experience any additional waiting time. Research about  
 18 empirical values of  $\tau_{early}$  and  $\tau_{late}$  is presented in (4). It is important to note that there is a difference  
 19 between driving ahead of schedule and driving late. Driving ahead (i.e. departing before the scheduled  
 20 departure time minus  $\tau_{early}$ ) leads to a waiting time equal to the headway ( $H_l^{sched}$ ; assuming punctual  
 21 departure of the successive vehicle). Especially in the case of low frequencies, this leads to a substantial  
 22 increase in passenger waiting time. Arriving late creates an additional waiting time equal to the delay  
 23 ( $\tilde{d}_{l,i,j}^{departure}$ ). Just as before, the additional waiting time is first calculated per stop.  
 24

$$25 \quad \begin{cases} \tilde{T}_{l,i,j}^{Add,waiting} = H_l^{sched} & \text{if} & \tilde{d}_{l,i,j}^{departure} \leq -\tau_{early} \\ \tilde{T}_{l,i,j}^{Add,waiting} = 0 & \text{if} & -\tau_{early} < \tilde{d}_{l,i,j}^{departure} < \tau_{late} \\ \tilde{T}_{l,i,j}^{Add,waiting} = \tilde{d}_{l,i,j}^{departure} & \text{if} & \tilde{d}_{l,i,j}^{departure} \geq \tau_{late} \end{cases} \quad (4)$$

$$26 \quad E(\tilde{T}_{l,j}^{Add,waiting}) = \frac{\sum_i E(\tilde{T}_{l,i,j}^{Add,waiting})}{n_{l,i}} \quad (5)$$

27 Where:

28  $E(\tilde{T}_{l,i,j}^{Add,waiting})$  = average additional waiting time per passenger due to unreliability of vehicle  $i$   
 29 of line  $l$  at stop  $j$

30  $H_l^{sched}$  = scheduled headway at line  $l$

31  $\tilde{d}_{l,i,j}^{departure}$  = departure deviation of vehicle  $i$  at stop  $j$  on line  $l$

32  $\tau_{early}$  = lower bound of arrival bandwidth of passengers at departure stop

33  $\tau_{late}$  = upper bound of arrival bandwidth of passengers at departure stop

34  $n_{l,i}$  = number of vehicles  $i$  on line  $l$



Based on the average additional travel time per passenger per stop of a line, the average additional travel time per passenger on the complete line is calculated. To do this, the proportion or percentage of boarding passengers per stop is used ( $\alpha_{l,j}$ ), as shown by Equation 6. Please note that using the proportion of passengers makes the indicator independent of the actual number of passengers.

$$E(\tilde{T}_l^{Add,waiting}) = \sum_j (\alpha_{l,j} * E(\tilde{T}_{l,j}^{Add,waiting})) \quad \text{with} \quad \sum_j \alpha_{l,j} = 1 \quad (6)$$

Where:

$\alpha_{l,j}$  = proportion of passengers of line  $l$  boarding at stop  $j$

The following section describes the proposed approach to obtain to translate operational data into the reliability attributes described on this section in order to be able to estimate the impacts of service reliability in a transport demand model.

### 3. THREE-STEP APPROACH


The objective in this paper is to incorporate service reliability in transit modeling in a static transport demand model by including the impacts of service reliability on passenger behavior. Therefore a three-step approach is proposed. Figure 3 shows the three steps consisting of:

*Step 1:* Analysis of transit schedule adherence, using AVL data;

*Step 2:* Calculation of passenger impacts caused by service reliability, using APC data and determination of the average additional travel time;

*Step 3:* Translation of passenger impacts into travel time units;

After the three steps are completed, the results are imported into existing static transport demand models that are able to calculate the effects on transit demand and on network performance.

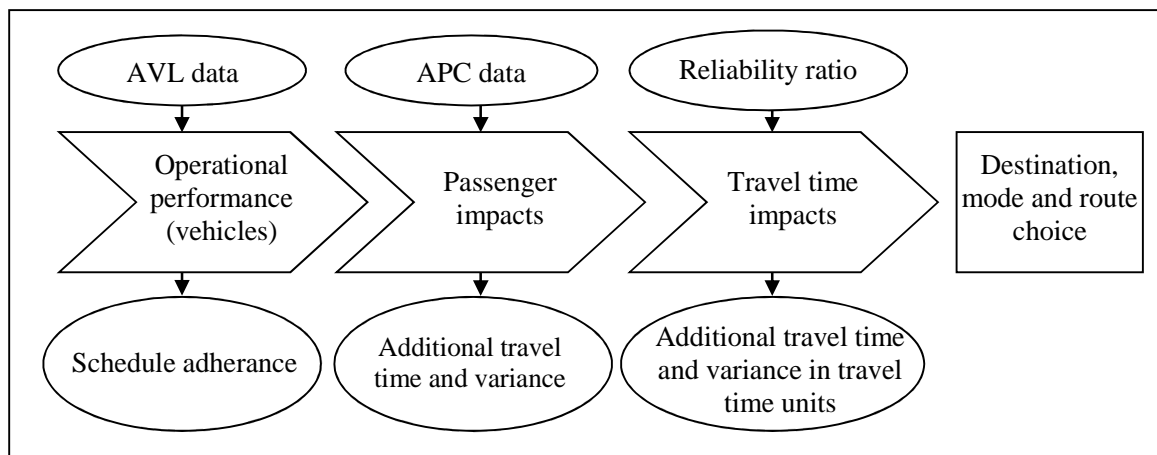

**FIGURE 3 Three-step approach for incorporating service reliability in a transport model (consisting of vehicle performance analysis, calculation of passenger impacts and translation of these into travel time units)**

*Step one* provides insight into performance characteristics such as trip time, dwell time and schedule adherence by comparing the schedule to the operational performance obtained from AVL data. Early or late departures and the difference between scheduled and actual headways are determined.

In *Step two* the travel time impacts are estimated by defining the average additional travel time, the waiting time standard deviation and the in-vehicle travel time standard deviation. Depending on the


1 passenger arrival pattern the average additional waiting time is calculated with either Equations 2 and 3 or  
 2 4 and 5.

3 In *step three* the average additional travel time can be directly added to the *base in-vehicle travel*  
 4 *time* (which in the transport demand model is estimated by multiplying the vehicle speed by the travelled  
 5 distance) providing an *average travel time* ( $\tilde{T}$ ). The estimation of the standard deviation of the travel  
 6 time and waiting time depends on the probability distribution function of the travel time pattern. Once the  
 7 standard deviations caused by the unreliability have been determined they are multiplied by a *reliability*  
 8 *ratio* to transform the standard deviations into travel time units. Various values for this reliability ratio are  
 9 found in literature ranging from 0.70 (17) to 1.40 (23).

10 The effects of service reliability as obtained from step three, may be added to the network in the  
 11 transport demand model. For this purpose the following two strategies are proposed:  
 12

13 *Reliability effects at the stop level.* Reliability data is calculated for every section between two  
 14 stops and for every stop. The reliability that is experienced within the in-vehicle travel time is included on  
 15 each section. The impacts of unreliability that are experienced at the boarding stop are included at the stop  
 16 in the model as a boarding additional waiting time. Consequently, when searching a route through the  
 17 transit network, the boarding penalty applies to all passengers boarding at a specific stop, while the  
 18 section reliability applies to all passengers traversing this section. Therefore, on a journey on one transit  
 19 line, a passenger experiences exactly one boarding penalty and several reliability effects on all sections.  
 20 In figure 4a an example trip is shown: if a passenger boards at stop 1 and alights at stop 3, he or she  
 21 experiences the reliability at stop 1 and 2 and on two sections.  
 22

23 *Reliability effects at the line level.* A value of reliability is estimated for the transit line as a  
 24 whole, by using Equation 6. This value is attached to the network as an unreliability factor ( $F_l$ ), which is  
 25 applied to the travel time for every transit line. In figure 4b an example trip is shown: if a passenger  
 26 boards at stop 1 and alights at stop 3, a reliability value proportional to the travel time between those two  
 27 stops is applied.

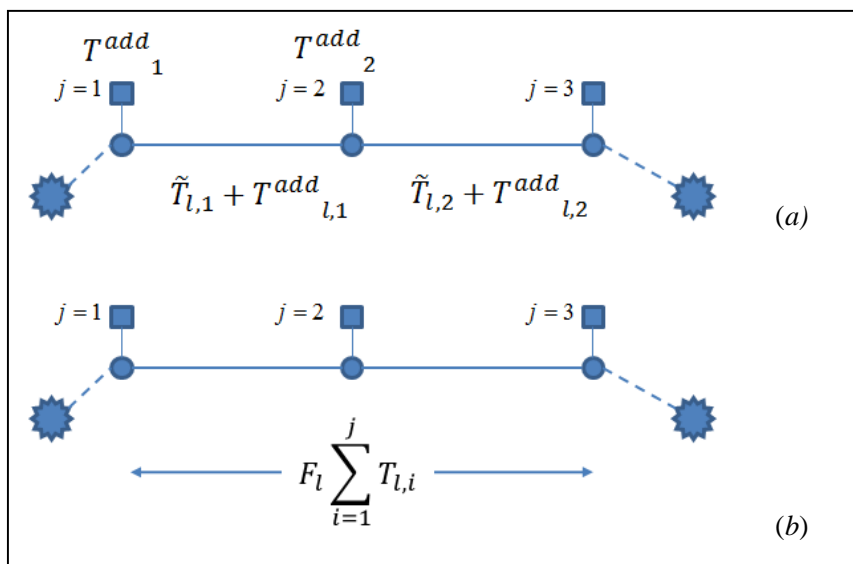

28 **FIGURE 4 Reliability effects at the stop level (a) and reliability effects at the line level (b).**

29  
 30 After the service reliability data is incorporated, existing modeling techniques are applied to  
 31 calculate expected ridership. The following section describes the application of this approach to a case  
 32 study in Utrecht, The Netherlands.  
 33

1 **4. CASE STUDY: CITY OF UTRECHT**


2 The first approach of incorporating service reliability in a demand model was applied in the transport  
 3 model of the Utrecht region in The Netherlands. Utrecht is the fourth largest city in The Netherlands with  
 4 over 300,000 inhabitants and is facing several challenges with regards to transit. Funding is reduced,  
 5 while quality is required to increase. The main issue while planning and designing transit is predicting the  
 6 impact of service reliability on demand and its benefits (5). Although a transport model (VRU3.0) is  
 7 available, service reliability was not accounted for until recently.

8 The VRU3.0 model is a multimodal transport model, containing car, bicycle and transit (train,  
 9 tram and bus). Its study area consists of the 9 municipalities cooperating in the region of Utrecht, with an  
 10 influence area that covers the Netherlands and some parts of Belgium and Germany. It contains 4,400  
 11 transportation zones, approximately 50,000 links, 5,000 transit stops and 900 transit lines.

12 To deal with the research question concerning service reliability the proposed three-step approach  
 13 was applied as follows.

14 The first step is to analyze historical operations with AVL data. AVL systems are of great help to  
 15 provide databases of historical performance with regards to travel time and reliability and APC data  
 16 allows obtaining an exact demand pattern over distance and over time. Although such data has already  
 17 been available for many operators, it is just since recently that this valuable data is also becoming  
 18 available to Dutch transit authorities, researchers and developers. Most transit operators and authorities  
 19 are involved with the initiative called *Transit Information without Borders* (GOVI in Dutch), aiming at  
 20 making a wide range of transit information available from planned timetables, fares, vehicle location and  
 21 punctuality (24).

22 GOVI was designed to facilitate data communication between vehicles and the land side enabling  
 23 dynamic passenger information. An additional benefit is that all the actual and scheduled vehicle  
 24 positions and times are logged in a database. Although this database was not the objective of the GOVI  
 25 system, it is extremely helpful to monitor and analyze transit performance through statistical analysis  
 26 making it possible to compute travel time distributions. Figure 5 shows an example of the processed data.  
 27

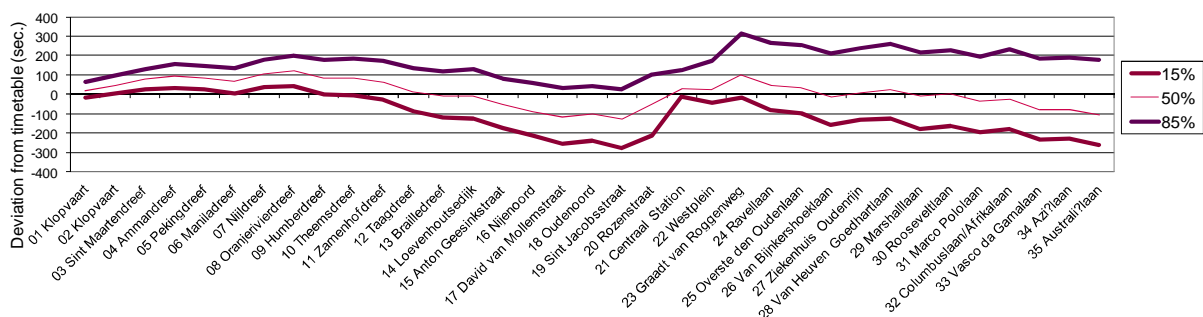

28 **FIGURE5 Example graph, punctuality development, bus line 7 Utrecht, evening rush hour.**

31 The second step is to transform the findings of step one into the average additional travel time  
 32 and standard deviations. Depending on the type of transit line and the passenger arrival pattern Equations  
 33 2 and 3 or 4 and 5 were used to calculate the average additional waiting time. The standard deviation of  
 34 additional waiting times was calculated as suggested in (11 and 25) and the standard deviation of in-  
 35 vehicle travel time is derived from operational data of the vehicle trip time variance assuming a normal  
 36 distribution.

37 In order to estimate the reliability ratio (step three) for this study the value of time (VOT) and the  
 38 value of reliability (VOR) were used. The values are taken from (26) which were corrected by inflation to  
 39 year 2011, as shown in Table 2.

1 **TABLE 2 Value of Time and Value of Reliability in 2011**

Travel purpose	Value of time (€/hour)	Value of reliability (€/hour)
<b>Business</b>	10.00	14.00
<b>Commuter</b>	17.44	24.42
<b>Other</b>	6.33	8.86

2  
3 This survey states that service reliability is valued 40% higher than travel time. Using these  
4 insights, the values of standard deviation were multiplied by a 1.4 factor to be added in travel time units  
5 to the generalized cost functions of the demand model. The waiting time portion of the travel time  
6 includes now the reliability effects consisting of: scheduled waiting time, average additional waiting time  
7 and additional waiting caused by variance.

8 Similarly, in-vehicle travel times were calculated, consisting of scheduled in-vehicle time and  
9 additional in-vehicle travel time caused by variance. After all the calculation of new waiting and in-  
10 vehicle times for all stops and links were performed both strategies were tested by incorporating these  
11 values in the transport model in the generalized cost matrix for all origin and destination pairs. Finally  
12 regular calculations on expected transit demand were performed.

13 This approach is one step towards a full incorporation of service reliability in transit modeling.  
14 The next section presents the results from both approaches and demonstrates the success of this method.  
15

## 16 5. DISCUSSION OF RESULTS

17 To illustrate the added value of this approach, the results of the synthetic model (the model results before  
18 calibration) with and without taking service reliability impacts into account are compared. These results  
19 indicate that the explanatory power of the model has changed and the method was beneficial.

20 For an area in the southern part of the Utrecht area, mainly consisting of the town of Nieuwegein,  
21 we compared the synthetic model results with 24 count values, using both strategies to incorporate  
22 reliability. Data was available for the buses and tram lines operated by the region of Utrecht. Below, the  
23 main findings of applying the three-step approach are presented. Table 3 summarizes them.  
24

25 **TABLE 3 Results of applied approach (including service reliability) in Utrecht model compared to**  
26 **case without service reliability**  
27

Impacts	Strategy 1 <i>Reliability effects at the stop level</i>	Strategy 2 <i>Reliability effects at the line level</i>
<b>Transit counts</b>		
Improved fit	15	13
Worse fit	9	11
<b>Absolute difference observed values and model results</b>	18% improvement	No improvement
<b>Other impacts</b>	Possibility of calculating impacts of improved service reliability	Possibility of calculating impacts of improved service reliability
<b>Other impacts</b>	Data provision for cost benefit analyses (with regard to service reliability impacts)	Data provision for cost benefit analyses (with regard to service reliability impacts)

28

29

1 *Strategy 1: Reliability effects at the stop level*

2 From the 24 transit count values, 15 synthetic model results show an improved fit and 9 results show a  
3 worse fit. In total, the absolute difference between observed values and the synthetic model results  
4 decreased by 18% (from 3,300 to 2,700; on a total amount of 9,300).

5  
6 *Strategy 2: Reliability effects at the line level*

7 From the 24 count values, 13 synthetic model results show an improved fit and 11 results show a worse  
8 fit. In total the absolute difference between observed and synthetic model results is at a similar level of  
9 approximately 3,300.

10  
11 Both strategies show a slight improvement concerning the fit of the synthetic model data to count  
12 data. Further, the assignment showed that a shift took place from less reliable bus lines to more reliable  
13 tram lines, which is in line with the expectations.

14 In addition to improved prediction quality, this approach also yields other valuable opportunities.  
15 Since we succeeded in incorporating service reliability impacts in the transport model, we are now also  
16 able to calculate the impacts of expected changes in the service reliability on transit demand. This is of  
17 great help to find optimal choices in both network and timetable design. The third benefit of our approach  
18 is that the result of the service reliability impacts on passengers are directly available as input for cost  
19 benefit analysis which was hardly possible until now (5).

20 From the literature review, the approach of including both travel time extension and standard  
21 deviation in the transport demand model seems the most appropriate choice in static modeling. However,  
22 this will be subject to future research.

23 Research is still needed on the value of the reliability ratio. In this research an estimate based on  
24 the ration between the value of time and the value of reliability has been used. However, other researchers  
25 found that the variation of this ratio is rather large, depending on the purpose of the trip and / or the socio  
26 economical characteristics of the passenger.

27 Ultimately it is recommended to apply the methodology presented in this article to more transit  
28 lines to determine if in general a stop or line approach, or maybe even a mode approach, yields better  
29 results.

30  
31 **6. CONCLUSIONS**

32 This paper dealt with service reliability in transit (modeling). Service reliability is considered very  
33 important, both from a passenger and an operator perspective. Surprisingly, this quality aspect is not  
34 explicitly considered in transport demand models, which limits the prediction accuracy of the models and  
35 in addition, it is not possible to calculate the impacts of expected changes in level of service reliability.  
36 Finally, service reliability time impacts that are necessary for cost benefit analyses are not available as  
37 model output.

38 In the long term, improvements of transport models will be necessary, but to deal with service  
39 reliability and ridership on the short term, we developed a three-step approach to incorporate service  
40 reliability when calculating expected ridership. We applied this approach with success in a case study in  
41 the city of Utrecht in The Netherlands. The three-step approach consists of analyzing operational  
42 performance, calculating passenger impacts and finally transforming these into travel time impacts.  
43 Transport models are able to deal with these and therefore all their standard functionalities can be used.  
44 The three-step approach proved to be a promising approach for the short term. We will continue our  
45 research to deal with service reliability in a more detailed way. To achieve that, utility functions could be  
46 adjusted in a way that service reliability will explicitly taken into account in the choice processes, instead  
47 of the presented approach where service reliability impacts are translated into travel time units.

48  
49  
50  
51

## 1 ACKNOWLEDGEMENTS

2 This research is performed in cooperation with BRU, the transit authority in the region Utrecht, the  
3 Netherlands, Delft University of Technology, Department of Transport & Planning, Goudappel Coffeng  
4 and Omnitrans International.

## 6 REFERENCES

7 (1) Outwater, M. L. and B. Charlton. The San Francisco Model in Practice. Validation, Testing and  
8 Application. In *Conference Proceedings 42. Innovations in Travel Demand Modeling. Summary of a*  
9 *conference*. Transportation Research Board of the National Academies, Austin, Texas, 2006, pp. 24-29.

10  
11 (2) Petersen, E. and P. Vovsha. Directions for Coordinated Improvement of Travel Surveys and Models.  
12 In *Conference Proceedings 42. Innovations in Travel Demand Modeling. Summary of a conference*.  
13 Transportation Research Board of the National Academies, Austin, Texas, 2006, pp. 85-88.

14  
15 (3) Hollander, Y. Direct versus indirect models for the effects of unreliability. *Transportation Research,*  
16 *Part A: Policy and Practice*, Vol. 40, No. 9, 2006, pp. 699-711.

17  
18 (4) Oort, N. van. Service Reliability and Urban Public Transport Design, *TRAIL. PhD Thesis Series*  
19 *T2011/2*, Delft, The Netherlands, 2011.  
20 [http://www.goudappel.nl/media/files/uploads/2011\\_Proefschrift\\_Niels\\_van\\_Oort.pdf](http://www.goudappel.nl/media/files/uploads/2011_Proefschrift_Niels_van_Oort.pdf). Accessed June 20,  
21 2012.

22  
23 (5) Oort, N. van. Quantifying benefits of enhanced service reliability in public transport, Presented at the  
24 12th Conference on Advanced Systems for Public Transport (CASPT), Santiago, Chili, 2012.

25  
26 (6) Oort, N. van, J. W. Boterman and R. van Nes. The impact of scheduling on service reliability: trip-  
27 time determination and holding points in long-headway services. *Public Transport*, Vol. 4, No.1, 2012,  
28 pp. 39-56.

29  
30 (7) Furth, P. G. and T. H. J. Muller. Service Reliability and Hidden Waiting Time: Insights from  
31 Automated Vehicle Location Data. In *Transportation Research Record: Journal of the Transportation*  
32 *Research Board, No. 1995*, Transportation Research Board of the National Academies, Washington, D.C.,  
33 2006, pp. 79-87.

34  
35 (8) Hickman, M. *Evaluating the Benefits of Bus Automatic Vehicle Location (AVL) Systems*. Chapter 5 in  
36 D. Levinson and D. Gillen (eds.), *Assessing the Benefits and Costs of Intelligent Transportation Systems*,  
37 Kluwer, Boston, 2004.

38  
39 (9) Pelletier, M., M. Trepanier and C. Morency. Smart card data use in public transit: A literature review.  
40 *Transportation Research Part C: Emerging Technologies*, Vol. 19, No. 4, 2011, pp. 557-568.

41  
42 (10) Bates, J., J. Polak, P. Jones and A. Cook. The valuation of reliability for personal travel.  
43 *Transportation Research Part E: Logistics and Transportation*, Vol. 37, No. 2, 2001, pp. 191-229.

44  
45 (11) Rietveld, P., F. R. Bruinsma and D. J. van Vuuren. Coping with unreliability in public transport  
46 chains: A case study for Netherlands. *Transportation Research A: Policy and Practice*, Vol. 35, No.  
47 6, 2001, pp. 539-559.

48  
49 (12) Paulley, N., R. Balcombe, R. Mackett, H. Titheridge, J. M. Preston, M. R. Wardman, J. D. Shires  
50 and P. White. The demand for public transport: The effects of fares, quality of service, income and car  
51 ownership. *Transport Policy*, Vol. 13, No. 4, 2006, pp. 295-306.

- 1  
2 (13) Brands, T., E. de Romph and T. Veitch. Modelling public transport route choice with multiple access  
3 and egress modes. Presented at 41st European Transport Conference, Frankfurt, Germany, 2013.  
4
- 5 (14) Lee, A., N. van Oort and R. van Nes. Service Reliability in a network context: impacts of  
6 synchronizing schedules in long headway services, *Submitted for Transportation Research Board 93rd*  
7 *Annual Meeting*, Washington, D.C., 2014.  
8
- 9 (15) Welding, P.I. The instability of a close interval service. *Operational Research Quarterly*, Vol. 8,  
10 No.3, 1957, pp.133-148.  
11
- 12 (16) Noland, R., K.A. Small. Travel time uncertainty, departure time and the cost of the morning  
13 commute. In *Transportation Research Record: Journal of the Transportation Research Board, No. 1493*,  
14 Transportation Research Board of the National Academies, Washington, D.C., 1995, pp. 150-158.  
15
- 16 (17) Noland, R. and J. Polak. Travel time variability: a review of theoretical and empirical  
17 issues. *Transport Reviews*, Vol. 22, No. 1, 2002, pp. 39-54.  
18
- 19 (18) Oort, N. van and R. van Nes. Regularity analysis for optimizing urban transit network design. *Public*  
20 *transport*, Vol. 1, No. 2, 2009, pp. 155-168.  
21
- 22 (19) Hensher, D. A., J. M. Rose and A. Collins. Identifying Commuter Preferences for Existing Modes  
23 and a Proposed Metro in Sydney, Australia. *Public Transport: Planning and Operations*, Vol. 3, No. 2,  
24 2011, pp. 109-147.  
25
- 26 (20) Kanacilo, E. M. and N. van Oort. Using a rail simulation library to assess impacts of transit network  
27 planning on operational quality. In J. Allen, E. Arias, C.A. Brebbia, C.J. Goodman, A.F. Rumsey, G.  
28 Sciuotto and N. Tomii (Eds.), *Computers in railways XI*, Southampton, UK. *WITpress*, 2008, pp. 35-44.  
29
- 30 (21) Osuna, E. E. and G. F. Newell. Control strategies for an idealized public transport  
31 system. *Transportation Science*, Vol.6, No. 1, 1972, pp.52-72.  
32
- 33 (22) Heap, R. C. and T. H. Thomas. The modelling of platooning tendencies in public transport. *Traffic*  
34 *Engineering and Control*, Vol. 8, No. 9, 1976, pp.360-362.  
35
- 36 (23) *SHRP 2 Reliability Project L05: Incorporating Reliability Performance Measures into the*  
37 *Transportation Planning Programming Processes*. Transportation Research Board of the  
38 National Academies, Strategic Highway Research Program, Washington, D.C., 2013, pp. 38-40  
39
- 40 (24) Oort, N. van, D. Sparing, T. Brands and R. Goverde. Optimizing Public Transport Planning and  
41 Operations Using Automatic Vehicle Location Data: The Dutch Example. Presented at the 3rd  
42 International Conference on Models and Technology for ITS, Dresden, Germany, 2013.  
43
- 44 (25) Turnquist, M.A. and L.A. Bowman. The effects of network structure on reliability of transit  
45 service. *Transportation Research Part B: Methodological*, Vol. 14, No. 1-2, 1980, pp.79-86.  
46
- 47 (26) *RAND Europe and AVV: The value of reliability in transport: Provisional values for The*  
48 *Netherlands based on expert opinion*, Rand Europe, Leiden, The Netherlands, 2005, Report TR-240-AVV  
49 for AVV.